



## REDEFINE BOUNDARIES


Bold and non-traditional, the pivot door takes the indoor/outdoor lifestyle to the next level.

### KEY FEATURES

- Designed for large, spectacular openings including Entranceways
- Matches Andersen Liftslide and Beefy Bifold profiles: Aluminum Wood-Clad (AWPD), All Aluminum with thermally broken panel (APD-T), All Aluminum (APD) and All Wood (WPD)
- The 3 3/16" profile design accepts either a 1/2" wood cladding attached to the interior by a patented fastening system that joins them structurally while separating them physically
- Available with all standard Andersen glass options including triple-pane glass

### SILL

- Available with standard sill or patented high performance, water management flush sill
- High performance flush sill: CW PG60 certified, multi-point locking activated with single lever handle (no additional shoot bolts required)
- High performance flush sill: LC PG30 certified for single-point lock
- Sill finish options: anodized mill or dark bronze
- Allows easy adjustment of closer without separate cover
- High performance flush sill designed for ADA/FFHA threshold requirement

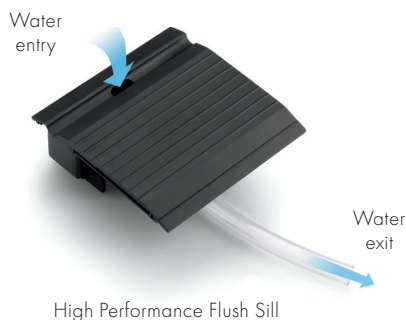

### SIZES & CONFIGURATION

- Pivot hardware eliminates side hinges and enables panel width up to 9' wide or as tall as 13' high
- Inswing, outswing, both inswing and outswing, single- or double-doors and gang pivot doors
- Lock rail configurations available

### FINISH OPTIONS

#### Exterior Options:

- 50 standard color options, custom colors available at no additional upcharge
- Three anodized finishes are available for a rich, lustrous metallic appearance – clear, black and dark bronze\*
- High-quality AAMA 2605 Kynar® finish is standard

#### Interior Options:

- Choose any wood species; common options include alder, mahogany,\*\* pine and vertical grain Douglas fir

\*Anodized finishes have a unique patina as result of naturally forming aluminum oxide on a surface. The process makes each unit one of a kind and may appear to have an inconsistent color and/or finish.

\*\*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.

"Kynar" is a registered trademark of Arkema, Inc.

# PIVOT DOORS

## PERFORMANCE COMPARISON CHART

	Aluminum Wood-Clad with Multi-Point Lock	Aluminum Wood-Clad with Single-Point Lock	All Aluminum - Thermally Broken Panel with Multi-Point Lock	All Aluminum - Thermally Broken Panel with Single-Point Lock	All Aluminum with Multi-Point Lock	All Aluminum with Single-Point Lock
Model	AWPD	AWPD	APD-T	APD-T	APD	APD
Configuration	Single Panel HP Sill Inswing or Outswing Multi-Point Lock	Single Panel HP Sill Inswing or Outswing Single-Point Lock	Single Panel HP Sill Inswing or Outswing Multi-Point Lock	Single Panel HP Sill Inswing or Outswing Single-Point Lock	Single Panel HP Sill Inswing or Outswing Multi-Point Lock	Single Panel HP Sill Inswing or Outswing Single-Point Lock
AAMA/WEMA/CSA 101/IS2/A440-08 AND -11	Class CW PG60 Size Tested 63.1875" x 124.44"	Class LC PG30 Size Tested 63.1875" x 124.44"	Class CW PG60 Size Tested 63.1875" x 124.44"	Class LC PG30 Size Tested 63.1875" x 124.44"	Class LC PG30 Size Tested 63.1875" x 124.44"	Class LC PG30 Size Tested 63.1875" x 124.44"
Design Pressure (DP)	+60/-60	+30/-30	+60/-60	+30/-30	+60/-60	+30/-30
Air Infiltration (CFM/FT <sup>2</sup> )	0.17	0.17	0.17	0.17	0.17	0.17
Water Test Pressure (SPF)	12.11	12.11	12.11	12.11	12.11	12.11

\*Hallmark rated max panel size: 5' x 10'

- "Performance Grade (PG)" ratings may vary from tested performance rating for larger or smaller units of a particular type. Some units may not be rated.
- This data is accurate as of March 2020. Due to ongoing product changes, updated test results or new industry standards, this data may change over time.
- Where designated, Andersen® products are certified and labeled to the requirements of the Hallmark Certification Program. Actual performance may vary based on variations in manufacturing, shipping, installation, environmental conditions and conditions of use.
- Contact your Andersen supplier for more information

## ADDITIONAL PERFORMANCE DETAILS

- Rated and Certified Performance for Aluminum Wood-Clad and All Aluminum single panel doors up to 5' wide and 10' tall
- Multiple pivot locations, 4" – center of panel
- NFRC rated for aluminum wood-clad panels

## HARDWARE

- Standard Verona style handles available
- Optional FSB® hardware – durable, stainless steel FSB hinged door hardware features clean lines and a sleek satin finish for a thoroughly modern look
- Custom hardware such as panic hardware or pull bar available

### VERONA



Brass  
Brushed Chrome  
Matte Black  
Oil Rubbed Bronze

### FSB®



1075                      1076                      1102

Satin Stainless Steel

The handle and thumb latch on FSB hardware will be in slightly different positions on Pivot Doors due to their configuration and operation.



For more information, visit [andersenwindows.com/bigdoors](http://andersenwindows.com/bigdoors)

Oil rubbed bronze is a "living" finish that changes with time and use.  
All marks where denoted are trademarks of Andersen Corporation and its subsidiary.  
©2020 Andersen Corporation. All rights reserved. 04/20